


User manual

Wireless IR Air Mouse Remote

1、 Button Functions

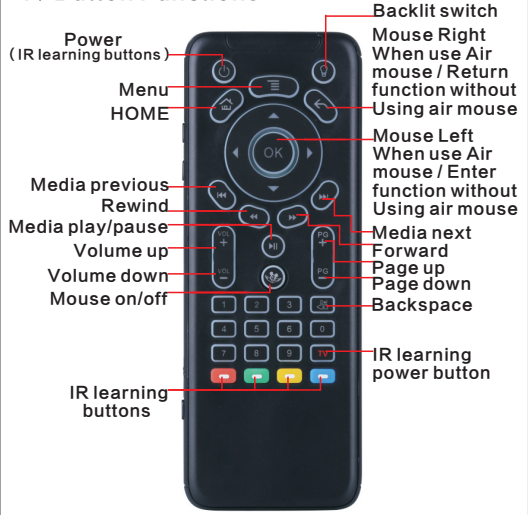

1. It's in work status in default, the blue led light will blink one time when press button
2. Five IR learning buttons:
Power , Red, Green, Yellow, Blue button

2、 Full size touch keyboard



It's touch keyboard with 39 buttons, release voice when press button.

1. Click Caps button to switch case input mode.
2. Click Fn button and then click blue buttons to get numeric or special characters; Click Fn button again to back to the normal.

3、 How to work with Remote control

1. USB receiver:
 - 1.1 It's plug and play, support Windows、 Android and iOS system.
2. How to pair:
 - 2.1 Press "OK" and "Return" button simultaneously, blue led light flash fast to release signal.
 - 2.2 Plug usb receiver into device usb port, after 3 seconds, when the led light go off, it means keyboard paired successfully with USB receiver.
3. How to adjust the mouse cursor move speed:
 - 3.1 Boost the speed:
Press "HOME" and "Volume+" button simultaneously, until led light flash.
 - 3.2 Slow down the speed:
Press "HOME" and "Volume-" button simultaneously, until led light flash.
4. How to adjust Air Mouse:
 - 4.1 Press OK and Menu button simultaneously and place keyboard on desk ;
 - 4.2 Until the led light turn off after flash, done.
Note:It's only available when mouse cursor float.
5. How to program IR learning buttons:
 - 5.1 Press "TV" button for 2~3 seconds, led light flash.
 - 5.2 Put this remote with your tv remote head to head, click one button on your tv remote, led light on this remote is solid.
 - 5.3 Click corresponding button on this remote, the led light on this remote flash again.
 - 5.4 Process other buttons as step 5.2 & 5.3.
 - 5.5 Press "TV" button for one second to complete the process.


Note:
Clear the IR learning record:
Press OK+DEL button for three seconds, when the led light is always on,done.

4、 Power consumption

1. Normal Mode:
Under 2.4G mode, <15mA
2. Standby Mode
Remote will go into sleep mode after 20 seconds without any operation, <25uA.
Click any button to wake up.

5、 Other buttons instruction

1. The arrow indication light is on when it's in touchpad mode.
2. Click the switch button, the ABC indication light is on when it's in keyboard mode.

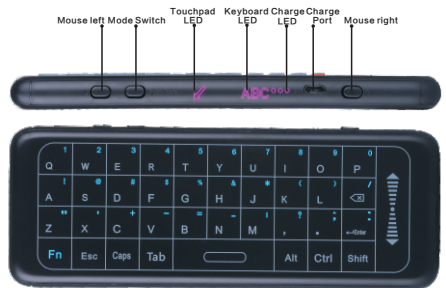

6、 Specifications

USB Receiver	Transmission rate	1Mbps
	Working frequency	2400.0MHz - 2483.5MHz
	Output Power	-18dBm - 0dBm
	Features	HID Compatible equipment
Controller	Transmission rate	1Mbps
	Working frequency	2400.0MHz - 2483.5MHz
	Output Power	-18dBm - 0dBm
Parameters	Features	Air mouse、 Game control、 QWERTY
	Dimensions	155X58.6X13mm
	Weight	78.5g